

CAMERA

# TD-9524E3

2MP IR Starlight Dome Network Camera



- 2MP ( 1920 × 1080 ) @30fps
- Support smart H.265/H.264 coding
- ICR auto switch, true day / night
- 20 ~ 30m IR night view distance
- Starlight
- 3D DNR, true WDR, HLC, BLC, Defog, Smart IR and ROI coding
- Support corridor mode
- Support image distortion correction
- 1CH audio input and 1CH built-in MIC
- Built-in micro SD card slot, up to 128GB
- DC12V/PoE power supply
- IP67 ingress protection
- Support three streams
- P2P function optional
- Support mobile surveillance by smart phones & tablet PCs with iOS and Android OS
- Intelligent analytics



H.265 Day&Night WDR AWB Defog HLC



BLC Motion Detection PoE IP67 VCA -30°~60°



[en.tvt.net.cn](http://en.tvt.net.cn)

For more information, please visit our website

**Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.**

Address: 23<sup>rd</sup> Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R.China

Tel: +86-755-36995888

Web site: <http://en.tvt.net.cn>

Fax: +86-755-33104777


E-mail: [overseas@tvt.net.cn](mailto:overseas@tvt.net.cn)

### SPECIFICATIONS

Model	TD-9524E3
<b>Specifications</b>	
<b>Camera</b>	
Image Sensor	1 / 2.8 "CMOS
Image Size	1920 × 1080
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Iris Type	Fixed Iris
Min. Illumination	0.005 lux@F1.6,AGC ON; 0 lux with IR 0.0028 lux@F1.2,AGC ON; 0 lux with IR
Lens	2.8 mm @F1.6, (fixed lens), horizontal field of view: 108° 3.6 mm @F1.6, (fixed lens), horizontal field of view: 89°
Lens Mount	M12
Wide Dynamic Range	120dB
BLC	Yes
HLC	Yes
Defog	Yes
Digital NR	3D DNR
Angle Adjustment	Pan: 0°~360°; Tilt:0°~75°; Rotation: 0°~360°
<b>Image</b>	
Video Compression	Smart H.265 / H.265+ / H.265 / Smart H.264 / H.264+ / H.264 / MJPEG
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile
Resolution	1080P ( 1920 × 1080 ), 720P ( 1280 × 720 ), D1, CIF, 480 × 240
Main Stream	60Hz : 1080P / 720P( 1 ~ 30fps ); 50Hz : 1080P/ 720P( 1 ~ 25fps )
Sub Stream	60Hz : 720P/D1/CIF (1~30fps); 50Hz: 720P/D1/CIF (1~25fps)
Third Stream	60Hz : D1/CIF/480x240 (1~30fps); 50Hz: D1/CIF/480x240 (1~25fps)
Bit Rate	64 Kbps ~ 6 Mbps
Bit Rate Type	VBR / CBR
Audio Compression	G711A / U
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast,Wide Dynamic, Sharpen, NR,etc. adjustable through client software or web browser
ROI	Each ROI to be configured separately
<b>Interfaces</b>	
Network	RJ45
Video Output	No
Audio	1CH audio input; Built-in MIC × 1
Storage	Built-in micro SD card slot; up to 128GB
Hardware Reset	Yes
<b>Functions</b>	
Remote Monitoring	Web browsing,CMS remote control
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, SNMP, HTTP, 802.1x, UPnP, HTTPs, QoS
Interface Protocol	ONVIF
Storage	Network remote storage; micro SD card storage
Smart Alarm	Motion detection, SD card error, SD card full
Intelligent Analytics	Object abandoned/missing detection, region entrance/exiting/intrusion detection(human/vehicle classification), line crossing detection(human/vehicle classification), video tampering detection, scene change detection, face detection, face capture, crowd density detection, heat map, human/vehicle counting, human tracking
General Function	Watermark, IP address filtering, video mask, heartbeat, password protection, non-photosensitive switch, image distortion correction
PoE	Yes
IR Distance	20 ~ 30 m
Ingress Protection	IP67

Others	
Power Supply	DC12V/PoE
Power Consumption	< 7.5W
Operating Environment	- 30 °C ~ 60 °C (-22°F~140°F) Humidity: less than 95 % (non-condensing)
Dimensions ( mm )	Φ 94.6 × 82.8
Weight ( net )	Approx. 0.46KG
Installation	Ceiling mounting (wall mounting available with the junction box and bracket)

### DIMENSIONS

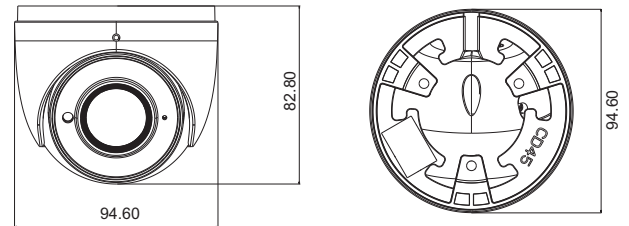

### AVAILABLE ACCESSORIES



### AVAILABLE MODEL

Available Model	TD-9524E3(D/PE/AR2)
-----------------	---------------------